

Aluminium Pole Ladder

Made from Aluminium Alloys



DESIGN NO. 25 APL.

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

SPECIFICATIONS

SIDES

Side Section
1 1/2" x 1" Approx

RUNGS

1" Dia Non-Slip Corrugated
Tubing at 12" Centre

HEIGHT AVAILABLE

FT. (Mtrs.)

6' (1.82) to 12' (3.65)

Aluminium Hook Ladder

Made from Aluminium Alloys



DESIGN NO. 50 AHL.

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Fitted with Solid Rubber Shoes & M.S. Hook on the Top

SPECIFICATIONS

SIDES

Channel Section
2 1/2" x 1 1/4" Approx

RUNGS

1" Dia Non-Slip Corrugated
Tubing at 10" Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
6' (1.82)	12' (3.65)	16' (4.86)
8' (2.43)	14' (4.25)	18' (5.47)
10' (3.04)	15' (4.56)	20' (6.08)
6' (1.82) to 24' (7.29)		

Aluminium Folding Baby Ladder

(With Flat Steps)

Made from Aluminium Alloys



- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF



DESCRIPTIONS

Fitted with Solid Rubber Shoes & automatic folding platform.

SPECIFICATIONS

STEPS

Channel Section of size
3.07" x 1.18"

SIDES

1.38" x .79"
Rectangular tube

HEIGHT AVAILABLE

Upto Platform only

FT. (Mtrs.)

3' (0.91) to 8' (2.43)

Aluminium Wall Extension Ladder 'Arco' Brand

Made from Aluminium Alloys



- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Fitted with Manila Rope, Pully Safety Locks and Solid Rubber Shoes and Caps.

SPECIFICATIONS

SIDES

Channel Section
2 1/2" x 1 1/2" Approx

RUNGS

1" Dia Non-Slip Corrugated
Tubing at 10" Centre

HEIGHT AVAILABLE

WHEN CLOSED	WHEN EXTENDED	WHEN CLOSED	WHEN EXTENDED
FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
8' (2.43)	12'14' (3.65/4.25)	16' (4.86)	30' (9.11)
10' (3.04)	18' (5.47)	16' (4.86)	40' (12.15)
12' (3.65)	20' (6.08)	18' (5.47)	32' (9.72)
12' (3.65)	21' (6.38)	20' (6.08)	35' (10.63)
14' (4.25)	24'25' (7.29/7.59)	20' (6.08)	50' (15.19)
16' (4.86)	28' (8.51)	24' (7.29)	40' (12.15)
16' (4.86)	29' (8.81)	30' (9.11)	50/55' (15.19/16.76)

Aluminium Folding Factory Ladder (Heavy Duty)

Made from Aluminium Alloys

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF



SPECIFICATIONS

SIDES

Channel Section
2 1/2" x 1 1/4" Approx

STEPS

2 1/2" x 1 1/4"
12" Centre to Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
4' (1.22)	10' (3.04)	16' (4.86)
5' (1.52)	12' (3.65)	18' (5.47)
6' (1.82)	14' (4.25)	20' (6.08)
8' (2.43)	15' (4.56)	

Aluminium Folding Flat Steps Ladder

Made from Aluminium Alloys



- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Fitted with Solid Rubber Shoes

SPECIFICATIONS

SIDES

Sides 3" x 3/4"
Step 3" x 3/4"
Back Size 1 3/4" x 1"

HEIGHT AVAILABLE

FT. (Mtrs.)
4' (1.22) to 12' (3.65)

Aluminium Single Ladder

Made from
Aluminium Alloys



DESIGN NO. 10 ASL.

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Fitted with Solid Rubber Shoes & Caps

SPECIFICATIONS

SIDES

Channel Section
2 1/8" x 1 1/4" Approx

RUNGS

1" Dia Non-Slip Corrugated
Tubing at 10" Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
5' (1.52)	12' (3.65)	18' (5.47)
6' (1.82)	14' (4.25)	20' (6.08)
6' (2.43)	15' (4.56)	24' (7.29)
10' (3.04)	16' (4.86)	30' (9.11)

Aluminium Single Ladder (With Flat Steps)

Made from
Aluminium Alloys



DESIGN NO. 12 ASL.

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Fitted with Solid Rubber Shoes & Caps

SPECIFICATIONS

SIDES

Channel Section
2 1/8" x 1 1/4" Dia Approx

STEPS

2 1/8" x 1 1/4"
12" Centre to Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)
5' (1.52)	14' (4.25)
6' (1.82)	15' (4.56)
8' (2.43)	16' (4.86)
10' (3.04)	18' (5.47)
12' (3.65)	20' (6.08)

Aluminium Single Ladder (With Flat Steps)



Made from
Aluminium Alloys



- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

SPECIFICATIONS

SIDES

Sides 3" x 3/4"

STEPS

Step 3" x 3/4"

HEIGHT AVAILABLE

FT. (Mtrs.)

4' (1.22)

6' (1.82)

8' (2.43)

10' (3.04)

12' (3.65)

ARCO BRAND ALUMINIUM LADDER'S

Technically Perfect,
Perfectly Manufactured



Permanent NSIC Registration No.
NSIC/GPB/RS/E-6/MH

In keeping with the changing trend of fast Emerging Markets & to Manufacture a better product, technical specification, sizes, weight, measurements wherever shown are approximate & subject to change without prior notice.

Aluminium Folding Factory Ladder

Made from Aluminium Alloys

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF



DESIGN NO. 52 AFPL.

DESCRIPTIONS

Non-Slip Corrugated Steps with Aluminium Firm Rigid And Platform on Top Enabling One Person to Handle

SPECIFICATIONS

SIDES

Channel Section
2 1/8" x 1 1/8" Approx

RUNGS

1" Dia Non-Slip Corrugated
Tubing at 12" Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
4' (1.22)	10' (3.04)	16' (4.86)
5' (1.52)	12' (3.65)	18' (5.47)
6' (1.82)	14' (4.25)	20' (6.08)
8' (2.43)	15' (4.56)	

Aluminium Folding Platform Ladder

Made from Aluminium Alloys

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF



DESIGN NO. 53 AFPL.

DESCRIPTIONS

Non-Slip Corrugated Steps with Aluminium Firm Rigid & Chequered Platform on Top Fitted with solid Rubber Shoes with Four Legs Enabling one person to Handle

SPECIFICATIONS

SIDES

Channel Section
1 1/8" x 1" Approx

RUNGS

1" Dia Non-Slip Corrugated
Tubing at 12" Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)
4' (1.22)	10' (3.04)
6' (1.82)	12' (3.65)
8' (2.43)	

Aluminium Self Supporting Platform Ladder



Made from Aluminium Alloys

DESIGN NO. 23 ASPL.



- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Fitted with Aluminium Firm Rigid, Solid Rubber Shoes and Automatic Movable Platform to Work Freely, fitted 2 feet below the top of the ladder.

SPECIFICATIONS

SIDES

Channel Section
2¹/₈" x 1¹/₄" Approx

RUNGS

1" Dia Non-Slip Corrugated Tubing at 10" Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)
6' (1.82)	14' (4.25)
8' (2.43)	16' (4.86)
10' (3.04)	18' (5.47)
12' (3.65)	20' (6.08)

Aluminium Double Step Trestle Ladder



Made from Aluminium Alloys

DESIGN NO. 24 ADTL.



- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Fitted with side Aluminium Firm rigid and Non-Slip Solid Rubber Shoes and Two Persons can Safely Work Simultaneously

SPECIFICATIONS

SIDES

Channel Section
2¹/₈" x 1¹/₄" Dia Approx

RUNGS

1" Dia Non-Slip Corrugated Tubing at 10" Centre

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)
6' (1.82)	14' (4.25)
8' (2.43)	16' (4.86)
10' (3.04)	18' (5.47)
12' (3.65)	20' (6.08)

Aluminium Trolley Step Ladder



Made from Aluminium Alloys



DESIGN NO. 108 ATSL.

- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Ladder with wide Step & Railings With Four Wheels
Chequered Platform at Top

SPECIFICATIONS

SIDES

2³/₈" x 1¹/₂" Approx

STEPS

2³/₈" x 1¹/₂" Approx

HEIGHT AVAILABLE

FT. (Mtrs.)	FT. (Mtrs.)
6' (1.82)	10' (3.04)
8' (2.43)	12' (3.65)

Aluminium Self Supporting Extension Ladder



Made from Aluminium Alloys



DESIGN NO. 20 ASSE.

- LIGHT IN WEIGHT
- FIRE PROOF
- RUST PROOF

SPECIFICATIONS

Fitted With Manila Rope, Pulley Safety Locks,
Solid Rubber Shoes, and Caps, With Aluminium Firm Rigid

SIDES

Channel Section
2³/₈" x 1¹/₂" Approx

RUNGS

1" Dia Non-Slip Corrugated
Tubing at 10" Centre

HEIGHT AVAILABLE

WHEN CLOSED FT. (Mtrs.)	WHEN EXTENDED FT. (Mtrs.)	WHEN CLOSED FT. (Mtrs.)	WHEN EXTENDED FT. (Mtrs.)
10' (3.04)	17' (5.17)	16' (4.86)	30' (9.11)
12' (3.65)	20' (6.08)	18' (5.47)	32' (9.72)
14' (4.25)	24' (7.29)	20' (6.08)	35' (10.63)
16' (4.86)	28' (8.51)	24' (7.29)	40' (12.15)

Aluminium Telescopic Tower Ladder

Made from Aluminium Alloys



- FIRE PROOF
- RUST PROOF

SPECIFICATIONS

SIDES

"C" Sections
2 1/8" x 1 1/4"

RUNGS

1" Dia Non-Slip Corrugated Tubing at 10" Centre to Centre

HEIGHT AVAILABLE

WHEN CLOSED FT. (Mtrs.)	WHEN EXTENDED FT. (Mtrs.)	WHEN CLOSED FT. (Mtrs.)	WHEN EXTENDED FT. (Mtrs.)
8' (2.43)	12/14' (3.65/4.25)	16' (4.86)	29' (8.81)
10' (3.04)	18' (5.47)	16' (4.86)	30' (9.11)
12' (3.65)	20' (6.08)	18' (5.47)	32' (9.72)
12' (3.65)	21' (6.38)	20' (6.08)	35' (10.63)
14' (4.25)	24/25' (7.29/7.59)	24' (7.29)	40' (12.15)
16' (4.86)	28' (8.51)		

Aluminium Telescopic Tower Ladder

Made from Aluminium Alloys



- FIRE PROOF
- RUST PROOF

SPECIFICATIONS

SIDES

"C" Section
2 1/8" x 1 1/4"

RUNGS

1" Dia Non-Slip Corrugated Tubing at 10" Centre to Centre


HEIGHT AVAILABLE

WHEN CLOSED FT. (Mtrs.)	WHEN EXTENDED FT. (Mtrs.)	WHEN CLOSED FT. (Mtrs.)	WHEN EXTENDED FT. (Mtrs.)
8' (2.43)	12/14' (3.65/4.25)	18' (5.47)	32' (9.72)
10' (3.04)	16/18' (4.86/5.47)	20' (6.08)	35/36' (10.63/10.93)
12' (3.65)	20/22' (6.08/6.68)	24' (7.29)	40' (12.15)
14' (4.25)	24/25' (7.29/7.59)		
16' (4.86)	28/30' (8.51/9.11)		

Aluminium Tilting Tower Ladder Square Type (Tilting Position)



Made from Aluminium Alloys

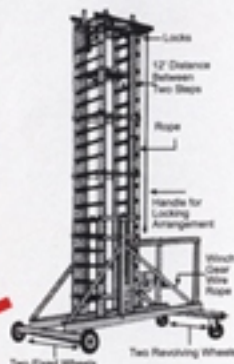

DESIGN NO. 106 ATTL.



- FIRE PROOF
- RUST PROOF

DESCRIPTIONS

Non-Slip Corrugated Steps with Chequered Platform on Top

SPECIFICATIONS

SIDES

2³/₈" x 1¹/₄"

RUNGS

1" Dia Non-Slip Corrugated Tubing at 12" Centre to Centre

HEIGHT AVAILABLE

WHEN CLOSED	WHEN EXTENDED	WHEN CLOSED	WHEN EXTENDED
FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
10' (3.04)	16' (4.86)	18' (5.47)	32' (9.72)
12' (3.65)	20' (6.08)	20' (6.08)	35' (10.63)
14' (4.25)	24' (7.29)	24' (7.29)	40' (12.15)
16' (4.86)	28' (8.51)	20' (6.08)	50' (15.19)
16' (4.86)	40' (12.15)		

Aluminium Jeep Tower Ladder (Tilted Position)




Made from Aluminium Alloys

- FIRE PROOF
- RUST PROOF



DESIGN NO. 107 AJTL.

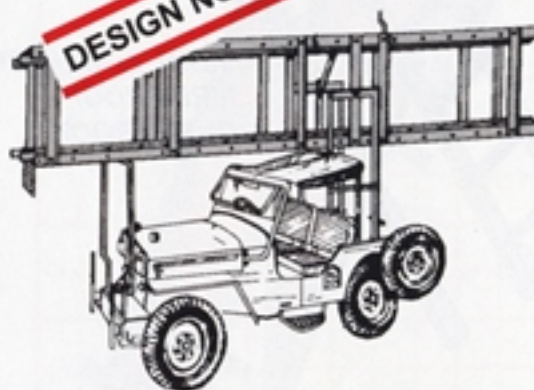

SPECIFICATIONS

SIDES

Channel Section
2³/₈" x 1¹/₄"

RUNGS

1" Dia Non-Slip Corrugated Tubing at 10" Centre

HEIGHT AVAILABLE

WHEN CLOSED	WHEN EXTENDED	WHEN CLOSED	WHEN EXTENDED
FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
8' (2.43)	12/14' (3.65/4.25)	16' (4.86)	28' (8.51)
10' (3.04)	18' (5.47)	18' (5.47)	32' (9.72)
12' (3.65)	20' (6.08)	20' (6.08)	35' (10.63)
14' (4.25)	24/25' (7.29/7.59)		

Aluminium Tower Ladder

Made from Aluminium Alloys



DESIGN NO. 105 ATWL.

- FIRE PROOF
- RUST PROOF



SPECIFICATIONS

SIDES

2³/₈" x 1¹/₄" C Section

RUNGS


1" Dia Non Slip Corrugated Tubing at 12" Centre to Centre
The Sliding Section Locks at all Rungs.
Supported on a pair of wheels of 3' to 4' feet dia with steel Spring, Axle, rope and platform is three feet below from top.

HEIGHT AVAILABLE

WHEN CLOSED	WHEN EXTENDED	WHEN CLOSED	WHEN EXTENDED
FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
10' (3.04)	16'18" (4.86/5.47)	18' (5.47)	32' (9.72)
12' (3.65)	20' (6.08)	20' (6.08)	35' (10.63)
14' (4.25)	24' (7.29)	24' (7.29)	40' (12.15)
16' (4.86)	27' (8.21)	20' (6.08)	50' (15.19)

Aluminium Tilting Tower Ladder (Square Type)

Made from Aluminium Alloys



DESIGN NO. 101

12" Distance Between Two Steps

Locks

Rope

- FIRE PROOF
- RUST PROOF

Handle for Locking Arrangement

Winch Gear and Wire Rope

M.S. Base 7'x5' and 6'x4'



DESCRIPTIONS

Non-Slip Corrugated Steps with Chequered Platform

SPECIFICATIONS

SIDES

2³/₈" x 1¹/₄"

RUNGS

1" Dia Non-Slip Corrugated Tubing at 12" Centre to Centre

HEIGHT AVAILABLE

WHEN CLOSED	WHEN EXTENDED	WHEN CLOSED	WHEN EXTENDED
FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)	FT. (Mtrs.)
10' (3.04)	16' (4.86)	18' (5.47)	32' (9.72)
12' (3.65)	20' (6.08)	20' (6.08)	35' (10.63)
14' (4.25)	24' (7.29)	24' (7.29)	40' (12.15)
16' (4.86)	28' (8.51)	20' (6.08)	50' (15.19)
16' (4.86)	40' (12.15)		